


# BioMaster

Secure biodiesel storage  
and dispensing



*The Power behind  
the Solution*

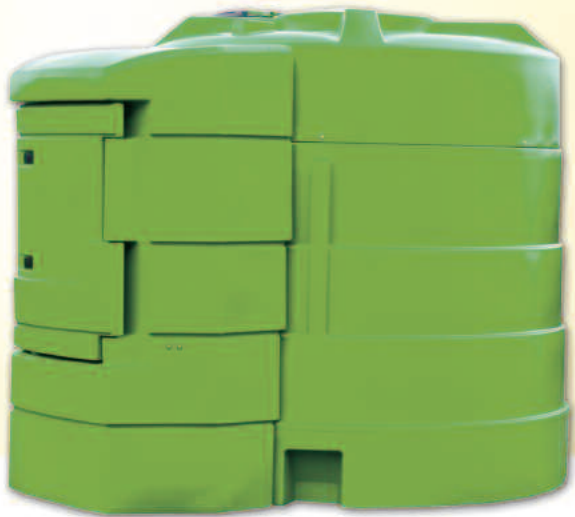

# TITAN

# BioMaster Details and Specifications

## **BioMaster30** Biodiesel storage and dispensing system



### BM30 1300

Capacity	1300 Litres/ 285 Gallons
Length	1890 mm
Width	1245 mm
Height	1785 mm



### BM30 2500

Capacity	2500 Litres/ 550 Gallons
Length	2430 mm
Width	1420 mm
Height	1855 mm



### BM30 3500

Capacity	3500 Litres/ 775 Gallons
Length	2080 mm
Width	2680 mm
Height	1900 mm



### BM30 5000

Capacity	5000 Litres/ 1100 Gallons
Base Dia.	3140 mm
Width	2070 mm
Height	2335 mm



### BMV30 5000

Capacity	5000 Litres/ 1100 Gallons
Length	2230 mm
Width	2800 mm
Height	2420 mm



The Titan BioMaster30, with its totally enclosed banded tank and integral pump and nozzle, is the perfect solution for those who need readily available bio fuel in a variety of locations.

The BioMaster30 is compact and simple to install.\* As it can be placed on a firm base at ground level, it is easily accessible for the clean and safe dispensing of up to 30% blends of biodiesel.

The BioMaster30 is manufactured from top quality polyethylene. Its robust, ribbed construction protects against accidental damage and will never rot or rust, even in the most exposed location. To ensure peace of mind, the BioMaster30 tank is guaranteed for two years and the pump and tank accessories for one year.

The tank comes with a special factory-fitted, mains electric Viscomat 90 pump and flowmeter, designed for Biodiesel use. The pump, hose, nozzle and holster are easy to keep clean and are concealed behind a lockable door.

BioMaster30 fully meets the requirements of the Control of Pollution (Oil Storage) (England) Regulations 2001.

BioMaster30 should be installed by a suitably qualified technician with OFTEC registration or equivalent.

The BioMaster30 is suitable for dispensing biodiesel EN BS 14214 or DIN 51606 up to 30% blend (B30). For higher blends up to 100% (B100), please contact a member of the Titan technical team on 028 4062 6260 for further specification.

#### Unique extras fitted as standard

- The Watchman Plus complete proactive fuel monitoring system.
- The SpillStop overfill protection system.
- Fitted light inside dispensing cabinet for easy vision (only available in 230 volt range).

#### Optional extras

A range of flowmeter options and fuel management systems are also available with all Titan BioMaster systems.

\* All mains powered Titan BioMaster30s must be connected and maintained by a suitably qualified electrician.



### Titan Environmental Limited

Seapatrick Road, Seapatrick, Banbridge, County Down, Northern Ireland BT32 4PH  
Sales Hotline Tel: +44 (0) 28 4062 1420 Tel: +44 (0) 28 4062 6260 Fax: +44 (0) 28 4062 6259

Dundalk Road, Carrickmacross, Co. Monaghan, Ireland  
Telephone Lo-Call (ROI): 1890 201 690 Fax Lo-Call (ROI): 1890 201 699

Email: [sales@titanenv.com](mailto:sales@titanenv.com) [www.titanenv.com](http://www.titanenv.com)

